


S.A. cylinder-type r (without head bush)

S.A. cylinder-type r (without head bush)

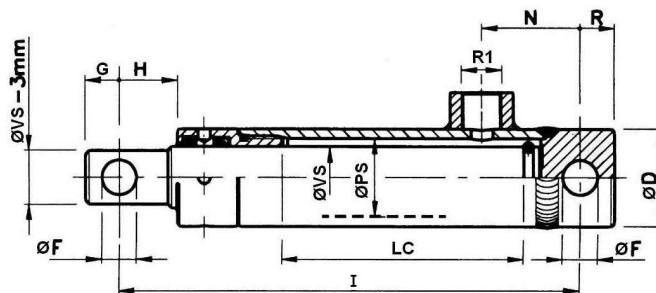

Pressure 180 bar

Temperature -30°C a 110°C

Part nº	R1	Kg/100 bar	Piston rod	ØPS	Stroke (mm)	ØD	ØF	G	H	I	N	R
SE25100	3/8" BSP	490	25	32 H9	100	40	14,2	14	24	190	40	14
SE25150	3/8" BSP	490	25	32 H9	150	40	14,2	14	24	240	40	14
SE25200	3/8" BSP	490	25	32 H9	200	40	14,2	14	24	290	40	14
SE25250	3/8" BSP	490	25	32 H9	250	40	14,2	14	24	340	40	14
SE25300	3/8" BSP	490	25	32 H9	300	40	14,2	14	24	490	40	14
SE30150	3/8" BSP	706	30	40 H9	150	50	16,4	16	26	250	44	15
SE30200	3/8" BSP	706	30	40 H9	200	50	16,4	16	26	300	44	15
SE30250	3/8" BSP	706	30	40 H9	250	50	16,4	16	26	350	44	15
SE30300	3/8" BSP	706	30	40 H9	300	50	16,4	16	26	400	44	15
SE30350	3/8" BSP	706	30	40 H9	350	50	16,4	16	26	450	44	15
SE30400	3/8" BSP	706	30	40 H9	400	50	16,4	16	26	500	44	15
SE30450	3/8" BSP	706	30	40 H9	450	50	16,4	16	26	550	44	15
SE30550	3/8" BSP	706	30	40 H9	550	50	16,4	16	26	650	44	15
SE30700	3/8" BSP	706	30	40 H9	700	50	16,4	16	26	800	44	15
SE40200	3/8" BSP	1250	40	50 H9	200	60	22,4	22	32	330	48	22
SE40250	3/8" BSP	1250	40	50 H9	250	60	22,4	22	32	380	48	22
SE40300	3/8" BSP	1250	40	50 H9	300	60	22,4	22	32	430	48	22
SE40350	3/8" BSP	1250	40	50 H9	350	60	22,4	22	32	480	48	22
SE40400	3/8" BSP	1250	40	50 H9	400	60	22,4	22	32	530	48	22
SE40450	3/8" BSP	1250	40	50 H9	450	60	22,4	22	32	580	48	22
SE40500	3/8" BSP	1250	40	50 H9	500	60	22,4	22	32	630	48	22
SE40550	3/8" BSP	1250	40	50 H9	550	60	22,4	22	32	680	48	22
SE40600	3/8" BSP	1250	40	50 H9	600	60	22,4	22	32	730	48	22
SE40700	3/8" BSP	1250	40	50 H9	700	60	22,4	22	32	830	48	22

*** Review attached PDF***