
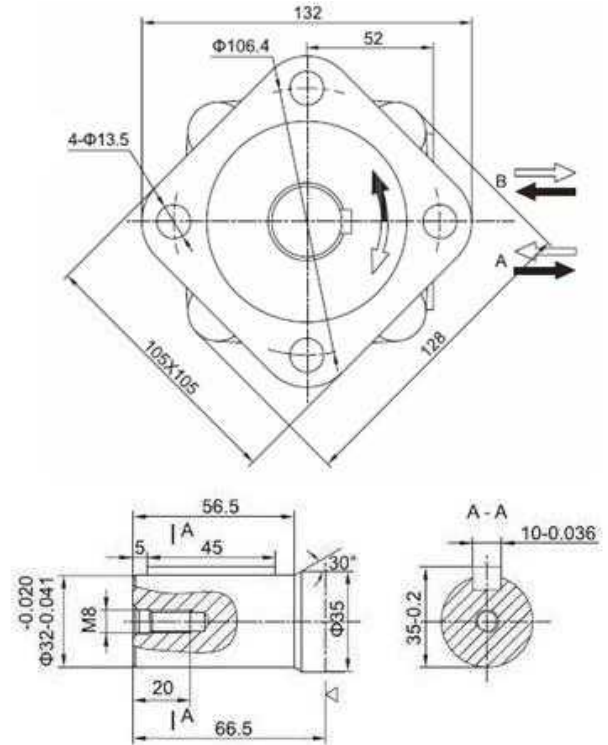


MOMS type motors

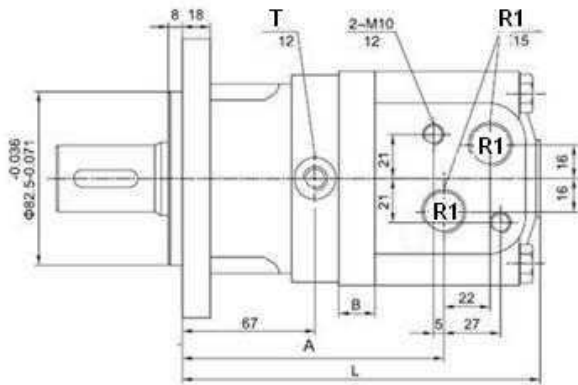

Shaft: cylindrical shaft, diameter 32 mm

Max. flow intern.: MOMS80 =80 (l/min); Others=90 (l/min)

Max. flow cont.: MOMS80 =65 (l/min); Others=75 (l/min)

T: drainage line, thread 1/4"

Power in kW. Torque in daN.m

Part n°	R1	Max. flow (l/min)	Max. press. cont.	Max. Peak press.	cm ³ / rev	R.P.M. cont.	R.P.M. int.	Max. torque cont.	Max. torque peak	Max. power cont.	A	B	L
MOMS80	1/2"	65	175	225	80	805	1000	19,8	26	16,4	124	11	167
MOMS100	1/2"	75	175	225	100	746	900	24,4	32,2	19,4	127	14,5	170
MOMS125	1/2"	75	175	225	125	598	718	30,7	40,5	20	132	19	175
MOMS160	1/2"	75	160	225	160	465	560	34	48,5	12	138	25	181
MOMS200	1/2"	75	150	225	200	373	447	39,5	64,8	14	145	32	188
MOMS250	1/2"	75	140	200	250	298	360	45	68	13,6	154	41	197
MOMS315	1/2"	75	120	185	315	236	290	54,1	84	11,5	166	53	208
MOMS400	1/2"	75	100	140	400	187	230	58	85	10	180	67	222

*Intermittent operation rating applies to 6 seconds of every minute.

*Peak load rating applies to 0.6 seconds of every minute.

*Peak load rating applies to 0.6 seconds of every minute.